


DSP600-211 NEW

4K Digital Signage Player with AMD Ryzen Embedded V1000 Series, 4 HDMI, 2 GbE LAN and 4 USB


Features

- AMD Ryzen Embedded V1000 series
- 2 DDR4-2400 SO-DIMM for up to 32GB of memory
- 4 HDMI 2.0 with 4K resolution
- 4 USB, 2 GbE LAN
- 1 M.2 Key E 2230 for Wi-Fi/BT
- 2 M.2 Key M 2280 for storage

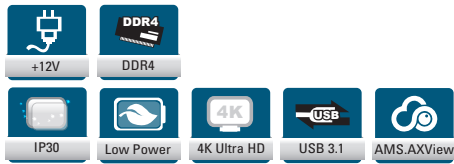

Specifications

| | |
|-----------------------|--|
| CPU | AMD Ryzen Embedded Quad Core V1807B/V1605B and Dual core V1202B onboard |
| Chipset | SoC integrated |
| System Memory | 2 x DDR4-2400 SO-DIMM, up to 32GB |
| Storage | 1 x M.2 Key M 2280 (SATA) 1 x M.2 Key M 2280 (NVMe) |
| TPM | TPM 2.0 |
| Watchdog Timer | 255 levels, 1 to 255 sec./min. |
| I/O | 2 x USB 3.1 2 x USB 2.0 2 x GbE LAN 1 x Device management 4 x HDMI 2.0 (4K supported) 2 x RS-232 1 x Line-out 1 x SIM card 1 x HDD LED 1 x Power switch 1 x Reset switch 1 x Remote switch 1 x Screw type VDC power input connector 4 x Antenna opening |
| Expansion Interface | 1 x M.2 Key E for Wi-Fi/BT 1 x M.2 Key B for 4G/LTE 1 x SIM card slot |
| Battery Lithium | Lithium 3 V/220 mAH |
| Power Input | +12V DC-in |
| Dimensions | 250 mm (9.84") (W) x 182.8 mm (7.19") (D) x 30 mm (1.18") (H) |
| Weight (net/gross) | 1.9 kg (4.18 lb)/2.9k g (6.39 lb) |
| Vibration Endurance | 3 Grms with M.2 storage (5 - 500Hz, X, Y, Z directions) |
| Operating Temperature | 0°C to +45°C (32°F to +113°F) |
| Humidity | 10% - 90% relative humidity, non-condensing |
| Certifications | CE, FCC class A |
| EOS Support | Win 10, Linux |
| Software Support | AMS.AXView 2.0 |

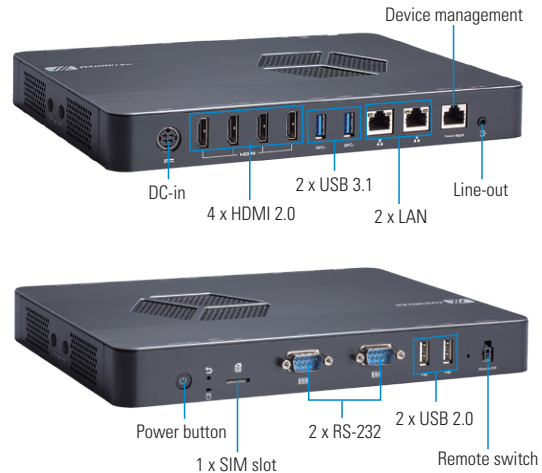

▲ Rear view

Packing List

| | |
|--------------------------|------------------------------|
| Standard | |
| Quick installation guide | |
| Optional | |
| Wall mount kit | |
| Adapter 12V 84W | |
| DDR4 SO-DIMM | 8GB - 32GB |
| Wireless LAN kit | Wi-Fi module and Antenna |
| Storage | M.2 Key M 2280 (SATA & NVMe) |

Ordering Information

| | |
|-------------------|---|
| Standard | |
| DSP600-211-V1807B | 4K Digital signage player with AMD Ryzen Embedded V1807B, 4 HDMI, 2 GbE LAN and 4 USB |
| DSP600-211-V1605B | 4K Digital signage player with AMD Ryzen Embedded V1605B, 4 HDMI, 2 GbE LAN and 4 USB |
| DSP600-211-V1202B | 4K Digital signage player with AMD Ryzen Embedded V1202B, 4 HDMI, 2 GbE LAN and 4 USB |

Dimensions

