


# M200i

19.5" All In One System / Intel® N2930

## Feature

- 19.5" HD TFT LCD with 30,000 hrs backlight life-time
- True-flat touchscreen with projected capacitive multi-touch control

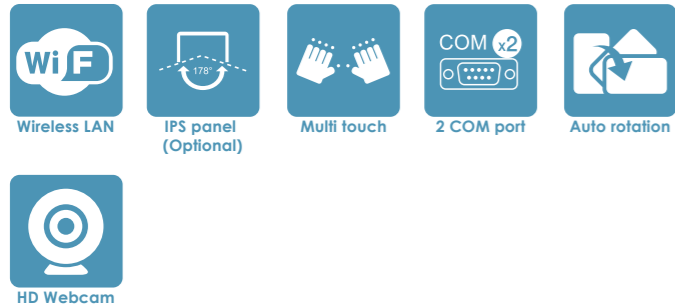


## I/O Interface



- ① Card Reader
- ② Kensington Lock
- ③ USB 2.0
- ④ COM
- ⑤ COM
- ⑥ Giga LAN
- ⑦ DC-in Jack

## Dimension (mm)

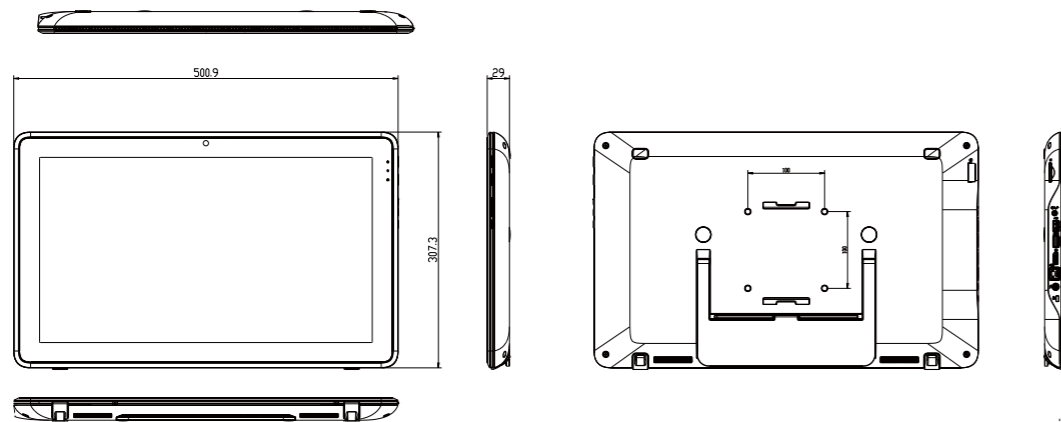

# M200i Light Industrial Panel PC

LCD	
Display Type	19.5" TFT-LCD
Max. Resolution	1600 x 900
Max. Colors	16.7M (6bit)
Luminance	250 cd/m2
Viewing Angle	178°/178°
Led Backlight (Hours)	30000

TOUCH SCREEN	
Type	P-CAP
Touch Screen	True-flat 10 points

SYSTEM	
Processor	Intel® Celeron Processor N2930 (2M Cache, up to 2.16 GHz)
Chipset	Integrated
System Memory	DDR3L 1333MHz, 1 x 204-pin SO-DIMM, Max. 8GB (Non-ECC)
Ethernet	Realtek RTL8111G Giga LAN
Motherboard	I/O Port
	1 x DC Jack
	2 x RS232
	4 x USB 2.0
Watchdog Timer	1~255 steps by software program
Storage Disk Drive	1 x SATA 2.5" / SSD bay
Expansion Slot	1 x Mini PCIe Half size (USB / PCIe)
Stereo Speaker	2 x 2W
Os Support	Windows 7 32/64bit, Windows 10 64bit, Linux (support by request)

SIDE I/O PORTS	
SD Card Reader	-
Webcam	1.0 HD mega pixel, HD 720p 16:9 lens with array digital microphone
System Button	Power

POWER REQUIREMENT	
Power Input	DC 19V
Power Adapter	AC to DC 65W adaptor

MECHANICAL	
Mounting	VESA mount support 100mm x 100mm (optional)
Dimension	501.7mm x 309.41 mm x 29mm
Weight	3kg (6.6 lb)

ENVIRONMENTAL	
Operating Temperature	0°C ~ 35°C
Storage Temperature	-20°C ~ 60°C
Storage Humidity	10% ~ 95% @60°C non-condensing
Vibration Resistance	Operating random vibration test 5-500Hz, 0.3Grms@with HDD
Shock Resistance	Operating 50 G peak (3 ms duration)
EMC	CE, FCC Class B
Front Panel Protection	-

## Ordering Information

System I/O								
Model Number	CPU	USB 3.0 / 2.0 / CardReader	Line out / Mic-in	mPCIe Full / Half Size	RS232	LAN	Wifi/BT	Power
M200i	N2930	0 / 4 / 1	0	0 / 1	2	1	optional	DC-in 19V

## Packing List

Packing		
1 x Panel PC	1 x Power Adapter (19V, 65W, DC Jack Type)	1 x Driver CD
1 x Quick Installation Guide	US + EU Power Cord	