

DSP511 NEW

4K Digital Signage Player with 11th Gen Intel® Core™ i5/i3 or Celeron® Processor, 4 HDMI, 4 USB, and 2.5G LAN

Features

- 11th gen Intel® Core™ i5/i3 or Celeron® processor (Tiger Lake UP3)
- 2 DDR4-3200 SO-DIMM for up to 64GB of memory
- 4 HDMI 2.0 in support of 4K resolution
- 4 USB, one 2.5G LAN and GbE LAN
- 1 M.2 Key E 2230 for Wi-Fi/Bluetooth
- 1 M.2 Key B 3052 for 5G/LTE
- 1 M.2 Key M 2280 for storage




Specifications

| | |
|-----------------------|---|
| CPU | 11th gen Intel® Core™ i5/i3 or Celeron® processor (Tiger Lake) |
| System Memory | 2 x DDR4-3200 SO-DIMM, up to 64GB |
| Chipset | N/A |
| Storage | 1x M.2 Key M 2280 (SATA & NVMe) |
| TPM | TPM 2.0 |
| WatchDog Timer | 255 levels, 1 to 255 sec./min. |
| System I/O Outlet | 3 x USB 3.2 Gen 2 1 x USB 2.0 1 x 2.5G LAN 1 x GbE LAN 1 x Device management 4 x HDMI 2.0 1 x Audio jack (combo) 1 x RS-232 1 x DC power input (lockable) 1 x SIM card socket 1 x HDD LED 1 x Power switch 1 x Reset switch 1 x Remote power switch 6 x Antenna opening |
| Expansion Interface | 1 x M.2 Key E 2230 for Wi-Fi/Bluetooth 1 x M.2 Key B 3052 for 5G/LTE 1 x SIM card slot |
| Battery Lithium | Lithium 3 V/220 mAH |
| Power Input | +12V DC-in |
| Dimension | 260 mm (10.24") (W) x 160 mm (6.3") (D) x 25 mm (0.99") (H) |
| Weight (net/gross) | 1.3 kg (2.86 lb)/2.07 kg (4.6 lb) |
| Certificate | CE, FCC class A |
| Operating Temperature | 0°C to +50°C (+32°F to +122°F) |
| Operation Humidity | 10% - 90% relative humidity, non-condensing |
| EOS support | Win 10 IoT, Linux |
| Software Support | Remote Device Management (RDM) |

Packing List


1 x Power adapter

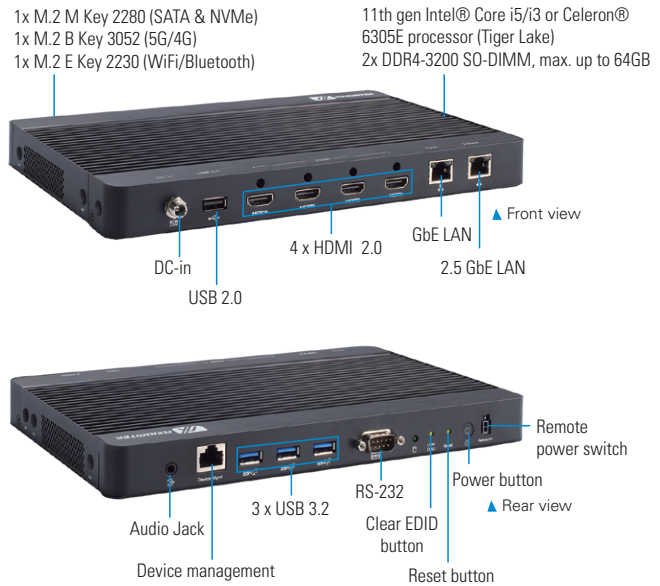

Ordering Information

| Standard | |
|-------------------|---|
| DSP511-6305E | Digital signage player with 11th gen Intel® Celeron® 6305E processor, 4 HDMI, 2.5G LAN, and USB 3.2 |
| DSP511-i3-1115G4E | Digital signage player with 11th gen Intel® Core™ i3-1115G4E processor, 4 HDMI, 2.5G LAN, and USB 3.2 |
| DSP511-i5-1145G7E | Digital signage player with 11th gen Intel® Core™ i5-1145G7E processor, 4 HDMI, 2.5G LAN, and USB 3.2 |

Dimensions

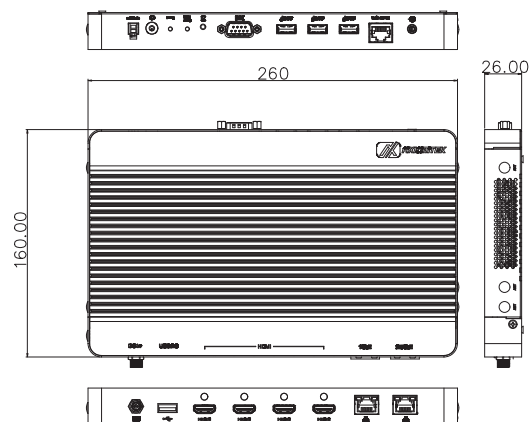

Digital Signage Players