Power Cord

RS232 Cable

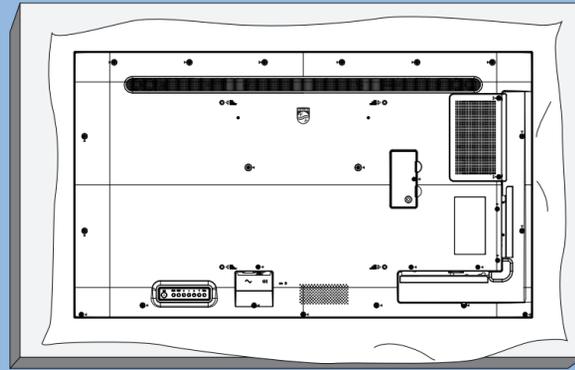RS232 Daisy Chain Cable

IR Sensor Cable

Philips logo plate

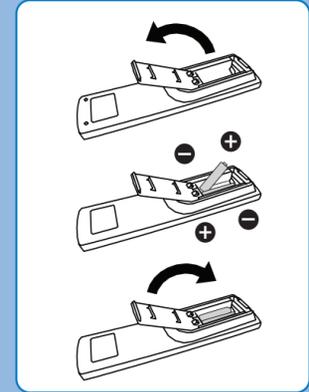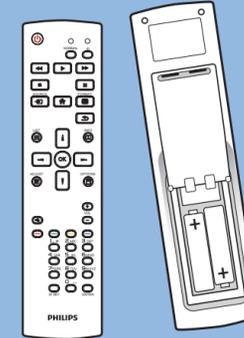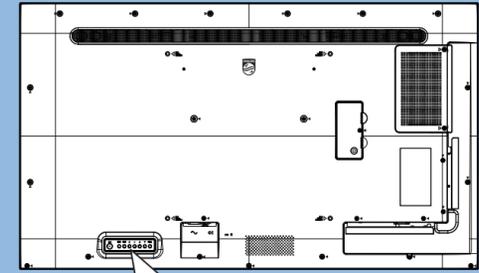AC Switch Cover x 1

USB Cover x 1

* Differences according to regions.
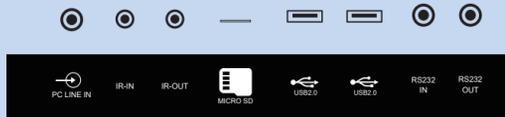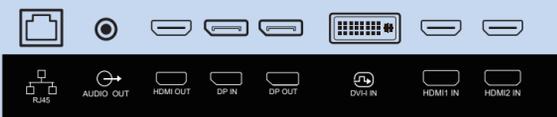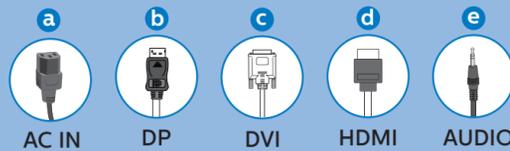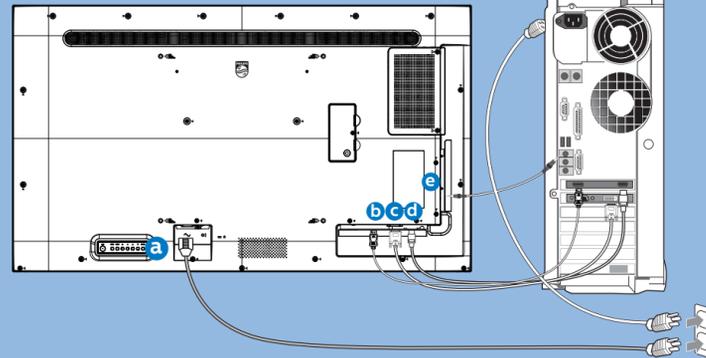Display design and accessories may differ from those illustrated above.

1

2

3

a AC IN
b DP
c DVI
d HDMI
e AUDIO

RJ45   AUDIO OUT   HDMI OUT   DP IN   DP OUT   DVI-I IN   HDMI1 IN   HDMI2 IN

PC LINE IN   IR-IN   IR-OUT   MICRO SD   USB2.0   USB2.0   RS232 IN   RS232 OUT
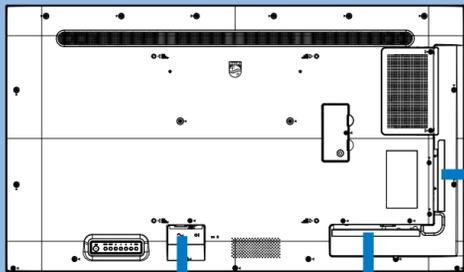
4

M6 * (10+X) mm
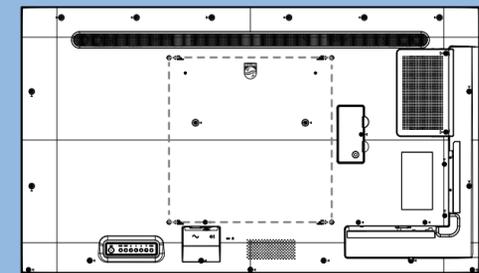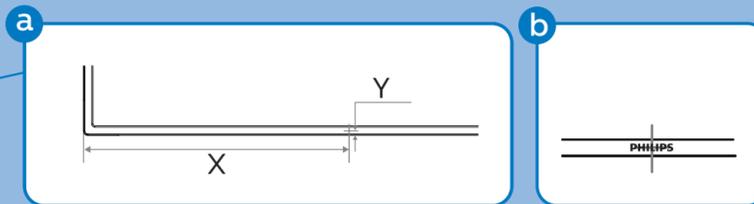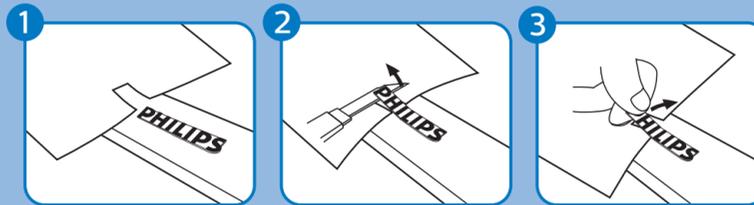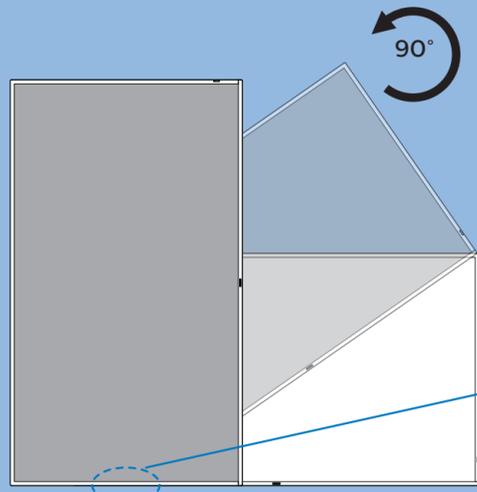(X=Thickness of Wall mount BKT)

43BDL4550D: 200mmx200mm
50BDL4550D: 400mmx400mm
55BDL4550D: 400mmx400mm

5

90°

1

2

3

a
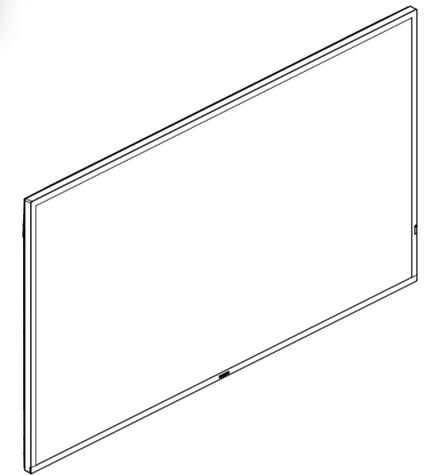
Y

X

b

PHILIPS

43BDL4550D: X=280.6mm Y=7.4mm
50BDL4550D: X=324.5mm Y=7.9mm
55BDL4550D: X=356.3mm Y=7.4mm

Quick
Start

Please check out the website below for more product information.
www.philips.com/signagesolutions-support

Q41G50M181310C