

# IPES-5416DFT-8 (IP67/IP43)

16 10/100TX + 2 1000T + 2 100/1000FX Dual Speed Fiber L2+ 8 PoE at/af

Industrial Managed Switch w/ enhanced G.8032 Ring

- EN50155/61373/45545-2 certified
- IEEE802.3at/af up to 30W per port; PoE management incl. detection and scheduling
- Optional 12V input boost to 48V output for IEEE802.3at/af max.80W
- Optional 72V input steps down to 48V output for IEEE 802.3at/af max.80W
- Optional 110V input to 48V output for IEEE 802.3at/af max.80W
- Enhanced G.8032 ring protection < 20ms with easy configuration; Train ring for dynamic coupling ring; Aggregation ring\*
- Support PTPv2 <1us, relay contact & environmental monitoring
- Miss-wiring avoidance; Repowered auto ring restore (node failure protection); Optional bypass protection
- IP67/ IP43 housing; User friendly UI, including auto topology drawing; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82 for Port&VLAN based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH/SSL, TACAS+\*, HTTPS, ACL, IPv6, SMS
- N-key configurator\*\* for upgrading, auto/editable configuration back up and restoration without computer



IP67 model



IP43 model



## OVERVIEW

Lantech IPES-5416DFT-8 (IP67/IP43) is a high performance L2+ (Gigabit uplink) switch with 16 10/100TX + 2 10/100/1000T + 2 Dual Speed Fiber w/8 PoE 802.3af/at Injectors by M12 provides L2 wire speed and advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms including train coupling ring, enhanced mode for easy configuration and aggregation ring\*, comprehensive QoS, QoS by VLAN, advanced security including ACL L2/L3, SSH/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port, QinQ\* (double tag VLAN) which are important features required in train and large network. It also supports Cisco Discovery Protocol (CDP) and LLDP for Ciscoworks to detect the switch info and show on L2 map topology.

Lantech IPES-5416DFT-8 (IP67/IP43) features hardware-based PTP IEEE1588 v2 function which can allow 2 10/100/1000T and 2 100/1000M Fiber uplinks to synchronize the network with precise accuracy (under 1μs).

Lantech IPES-5416DFT-8 (IP67/IP43) supports IEEE802.3at/af standard which can feed HI-power up to 30W at each PoE port for big power consumption devices like PTZ IP camera, High power wireless AP etc. The advanced PoE management includes PoE detection and scheduling besides the regular PoE per port status. PoE detection can detect if the connected PD is hang up then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Per port PoE status can remotely On/Off the power and display information of voltage, current, watt and PoE temperature.

The Lantech IPES-5416DFT-8 (IP67/IP43) series is designed with various dual power input at 12/24/48VDC input (12V model), 72V input to feed 48V PoE (72V model). The 110V model can accept dual 110V to feed 48V POE at PoE budget max 80W. Featured with relay contact alarm function, the IPES-5416DFT-8 (IP67/IP43) is able to connect with alarm system in case of power failure or port disconnection events. The IPES-5416DFT-8 (IP67/IP43) also provides ±2000V EFT and ±6000V ESD protection, which can reduce unstable

situation caused by power line and Ethernet.

The IPES-5416DFT-8 (IP67/IP43) also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IPES-5416DFT-8 (IP67/IP43) is able to alert with the LED indicator and send out an email, traps or a SMS text. Repowered auto ring restore function (node failure protection) ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection. The optional hardware bypass function provides redundant fiber connection when power or switch fails in a ring or bus structure.

DHCP option 82 and relay agent function (port&vlan based DHCP distribution) can offer the same IP address on port base or vlan base where there is need to replace the new device connecting to Lantech switches to avoid any network disruption. The built-in DHCP Option 82 server offers the convenience of police setting on the switch. Mac based DHCP server function assigns an IP address according to its MAC address to include dumb switches in DHCP network.

Lantech InstaConfig software\*\* provides easy configuration for mass deployment. The configuration file can also be exported in text file so that it can be edited and configured back to switch with ease for mass deployment. The built-in watchdog design can automatically reboot the switch when cpu is found dead.

The user friendly UI, innovative auto topology drawing and topology demo makes IPES-5416DFT-8 (IP67/IP43) much easier to get hands-on. The switch also equips the RTC (real time clock) which can keep track of time always. The complete CLI enables professional engineer to configure setting by command line.

Lantech IPES-5416DFT-8 (IP67/IP43) features enhanced G.8032 ring which can be self-healed in less than 20ms for ring/chain topologies which covers dynamic coupling ring & aggregation ring\* protection. The innovative auto-Ring configurator (auto mode) can calculate owner and neighbor in one step. The enhanced mode and train mode ring configuration have never been easier. It supports MSTP that allows RSTP over Vlan for redundant links. The train ring is specially designed for auto coupling topology that is required in train car interchange application. The ITU G.8032 Ring and

RSTP can be co-existed in the same switch with different ports for the most flexible protection.

The configuration file of Lantech IPES-5416DFT-8 (IP67/IP43) can be exported in text file so that it can be edited and configured back to switch with ease for mass deployment. The optional N-key configurator offers firmware upgrade, auto/editable configuration back up and restoration without computer by adjusting the DIP switch.

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

In case of event alarm, the IPES-5416DFT-8 (IP67/IP43) will immediately send an email & SMS text message to pre-defined addresses as well as SNMP Traps out. It provides 1DI and 1DO while disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

The built-in environmental monitoring can detect switch overall temperature, voltage and current where can send the SNMP traps, email and SMS alert when abnormal.

Lantech IPES-5416DFT-8 (IP67/IP43) features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.

The IPES-5416DFT-8 (IP67/IP43) is designed to meet with critical network environment with IP67/IP43 aluminum enclosure and M12 connectors for water proof. It passed serious tests under extensive Industrial EMI and Safety standards. With EN45545-2 Fire & Smoke, E-mark\*, and EN50155 certification, the IPES-5416DFT-8 (IP67/IP43) is best for railway in train/track side, vehicle and mining applications. For more usage flexibilities, IPES-5416DFT-8 (IP67/IP43) supports wide operating temperature from -40°C to 75°C.

The optional bypass relay is set to bypass the switch to the next one in 4ms when power is off in order to protect the network from crashing. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. The bypass is also activated when detecting the CPU watchdog is ON.


## FEATURES & BENEFITS

- 16 10/100TX + 2 10/100/1000T + 2 Dual Speed Fiber w/8 PoE 802.3af/at Injectors Industrial Managed IP67/IP43 M12 Switch (Total 20 Ports Switch)
- EN45545-2 Fire & Smoke, EN50155 and EN61373 shock/vibration certified
- IEEE802.3at/af feeding power up to 30W per PoE port at 45~56VDC at port 1-8
- PoE management including PoE detection and scheduling for PD (power devices)
- 12V model can accept dual 12V power input and boost to 48V for PoE 802.3at/af max 80W budget
- 72V model can accept dual 50.4~90V power input


- and feed 48V for PoE at/af at max 80W budget
- 110V model can accept dual 43V~160V input and feed 48V for PoE at/af at max 80W budget
- IEEE 1588 PTP v2 (under 1μs) at 4 Giga ports
- N-key\*\* configurator for firmware upgrade, auto/editable configuration back up and restoration
- Back-plane (Switching Fabric): 11.2Gbps
- 16K MAC address table
- 9KB Jumbo frame supported on all ports
- User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting
- Enhanced G.8032 Ring protection in 20ms < 256 switches
  - Support various ring/chain topologies, including train dynamic coupling ring& aggregation ring\*
  - Enhanced G.8032 ring configuration with ease
  - Auto ring configuration(auto mode) for single ring
  - Co-exist with RSTP on different ports
  - Train ring for auto coupling topology
- Aggregation ring for ring redundancy and bandwidth combination\*
- Provides EFT protection ±2000 VDC for power line.
- Supports ±6000 VDC Ethernet ESD protection
- LACP load balancing to distribute the load\*
- Built-in RTC (Real Time Clock) to keep track of time
- Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority
- IEEE 802.1d STP, IEEE 802.1w RSTP,802.1s MSTP VLAN redundancy
- 4K 802.1Q VLAN, Port based VLAN, GVRP\*\*, QinQ\*
- Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console/ Lantech™ InstaConfig\*\*/ Lantech™ InstaView\*\*
- DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server for Port&Vlan based DHCP distribution
- Mac based DHCP server to assign IP address that includes dumb switches in DHCP network
- Bandwidth Control
  - Ingress packet filter and egress rate limit
  - Broadcast/multicast packet filter control
- Relay alarm output system events
- Miss-wiring avoidance
  - LED indicator
  - Email, traps, or SMS notification
- Repowered auto ring restore
  - Ensure the switches in a ring to survive after power breakout is back
  - The status can be shown in NMS when each switch is back
- TFTP/HTTP firmware upgrade; Lantech™ InstaConfig\*\* for multiple upgrade
- System Event Log, SMTP Email alert, SMS mobile (text) and SNMP Trap for alarm support; 32 RMON counters
- Security
  - SSL/SSH/ACL L2&L3
  - Port Security: MAC address entries/Filter/MAC-Port binding
  - IP Security: IP address security management to prevent unauthorized intruder.
  - Management access control with priority
  - Login Security: IEEE802.1X/RADIUS
  - HTTPS for secure access to the web interface
- Static multicast forwarding forward reversed IGMP flow (MVR) with multicast packets binding with ports for IP surveillance application
- Multicast static route for non- IGMP camera to prevent flooding; IGMP router port to assign query in ring and for reversed multicast video flow
- Multicast VLAN registration for metro video\*
- IGMPv1,v2,v3 with Query mode for multimedia; GMRP\*\*
- Watchdog design to auto reboot switch CPU is found dead
- Built-in environmental monitoring for system input voltage, current, ambient temperature
- Supports DIDO (Digital Input/Digital Output)
- IP67/IP43 aluminum housing with DIN rail\*\* and wall mount design
- Bypass protection\*\* - Bypass failed switch caused by power failure of switch to protect network intactness

**DIMENSIONS (unit=mm)**

**IP67 model**

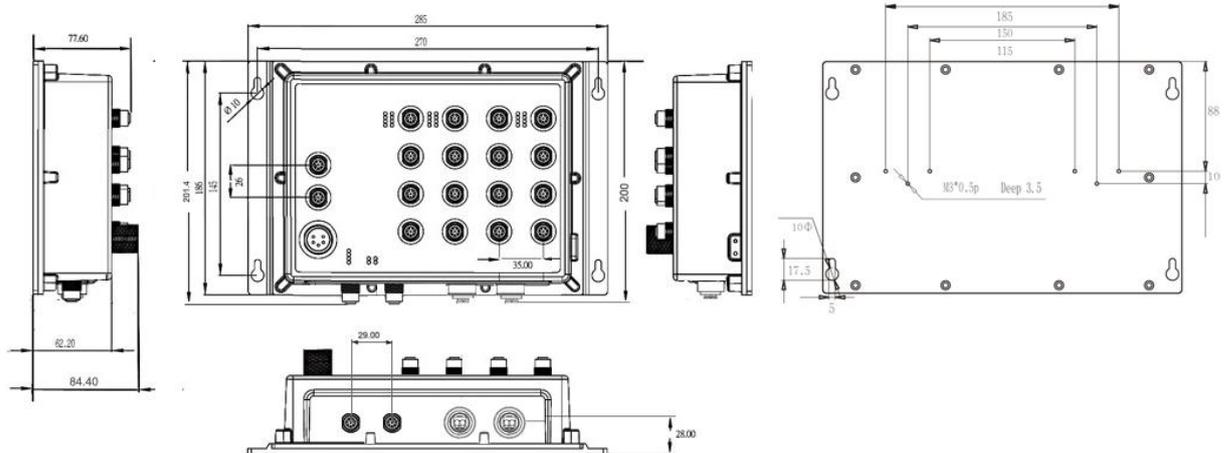

**IP43 model**

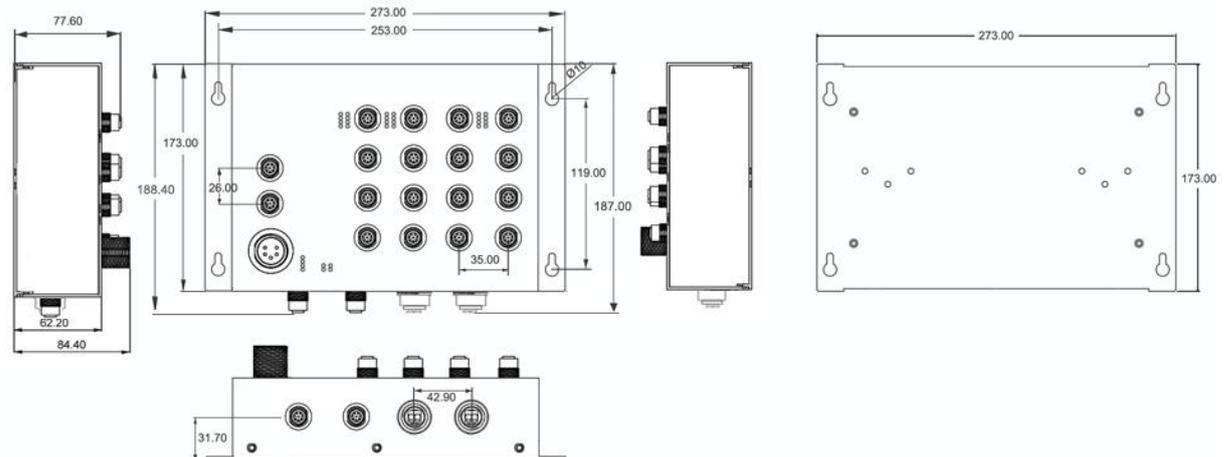


**SPECIFICATION**

**Hardware Specification**

|                     |  |
|---------------------|--|
| Standards           | IEEE 802.3 10Base-T Ethernet<br>IEEE 802.3u 100Base-TX<br>IEEE802.3z Gigabit fiber<br>IEEE802.3x Flow Control and Back Pressure<br>IEEE802.3ad Port trunk with LACP<br>IEEE802.1d Spanning Tree<br>IEEE802.1w Rapid Spanning Tree<br>IEEE802.1s Multiple Spanning Tree<br>IEEE 802.3ad Link Aggregation Control Protocol (LACP)<br>IEEE 802.1AB Link Layer Discovery Protocol (LLDP)<br>IEEE 802.1X User Authentication (Radius)<br>IEEE802.1p Class of Service<br>IEEE802.1Q VLAN Tag<br>IEEE802.3at/af Power over Ethernet |
| Switch Architecture | Back-plane (Switching Fabric): 11.2Gbps<br>Packet throughput ability (Full-Duplex): 23.8Mpps @64bytes  |
| Transfer Rate       | 14,880pps for Ethernet port<br>148,800pps for Fast Ethernet port<br>1,488,000pps for Gigabit Fiber Ethernet port   |

|                    |   |
|--------------------|---|
| CPU                | Marvell 800Mhz  |
| RAM                | 256M Byte   |
| Flash              | 128M Byte   |
| Mac Address        | 16K MAC address table   |
| Jumbo frame        | 9KB on all ports  |
| Connectors         | 10/100TX: 16 x ports M12 4-pole D-coded with Auto MDI/MDI-X function<br>10/100/1000T: 2 x ports M12 8-pole A-coded with Auto MDI/MDI-X function<br>100/1000 Dual Speed Fiber: 2 x LC connector for single-mode or multi-mode type fiber cable<br>RS-232 connector: 1 x M12 5-pole A-coded<br>Power Input connector : 1 x M23 5-pole A-coded<br>Relay contact : 1 x M12 5-pole A-coded |
| Network Cable      | 10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable<br>EIA/TIA-568 100-ohm (100m)<br>100Base-TX: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable<br>EIA/TIA-568 100-ohm (100m)<br>1000Base-TX: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable<br>EIA/TIA-568 100-ohm (100m)   |
| Giga Optical Cable | Multi-mode: 50/125um-62.5/125um<br>Single mode: 9/125um   |

|                        |   |
|------------------------|---|
|                        | Available distance: 0.5km (Multi-mode)/10km (Single-mode)<br>Wavelength: 850nm (Multi-mode)/850nm (Single-mode)   |
| 100M Optical Cable     | Multi-mode: 50/125um~62.5/125um<br>Single mode: 9/125um<br>Available distance: 2km (Multi-mode)/10km (Single-mode)<br>Wavelength: 850nm (Multi-mode)/850nm (Single-mode)                                    |
| Bypass Protection**    | High-speed optical switching (<4ms)<br>Minimal insertion loss (Max 1.6dB as Bypass Mode)  |
| Protocol               | CSMA/CD   |
| LED                    | Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red)<br>Ethernet port: Link/Activity (Green), Speed (Green);<br>Optical fiber: Link/Activity (Green)  |
| DI/DO                  | 1 Digital Input (DI) :<br>Level 0: -30~2V / Level 1: 10~30V<br>Max. input current:8mA<br>1 Digital Output(DO): Open collector to 40 VDC, 200mA  |
| Operating Humidity     | 5% ~ 95% (Non-condensing)   |
| Operating Temperature  | -40°C~75°C / -40°F~167°F<br>(72V model: -40°C~60°C / -40°F~140°F)   |
| Storage Temperature    | -40°C~85°C / -40°F~185°F  |
| Power Supply           | 45~56VDC on standard model<br>9.5~56VDC on 12V model<br>50.4~90VDC on 72V model<br>43~160VDC on 110V model with input isolation   |
| PoE Budget             | 240W for 45~56V input<br>(55V input is recommended for 802.3at 30W applications)<br>80W for 12V input<br>120W for 24V input<br>80W for 72V Input<br>80W for 110V Input                                      |
| PoE pin assignment     | M12 port # 1~#8 support IEEE 802.3at/af End-point, Alternative A mode. Per port provides 30W PoE at/ 15W PoE af.<br><br> |
| Power Consumption      | Max. 13W 12V~48VDC input<br>Max. 16W 72VDC/110VDC input   |
| Case Dimension         | IP67 model: Aluminum case<br>285mm(W)x200mm(H)x84.4mm(D)<br><br>IP43 model: Aluminum case<br>273mm(W)x187mm(H)x84.4mm(D)  |
| Weight                 | 2.1kgs(IP67); 1.8kgs (IP43)   |
| Installation           | DIN Rail** and Wall Mount Design  |
| EMI & EMS              | FCC Class A,<br>CE EN61000-6-2, CE EN61000-6-4, CE EN61000-4-2,<br>CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5,<br>CE EN61000-4-6, CE N61000-4-8, EN61000-4-11   |
| Stability Testing      | IEC60068-2-32 (Free fall), EN61373 (Shock and Vibration)  |
| MTBF                   | NA  |
| Certifications& report | EN50155/EN50121-3-2/EN50121-4 Certificate<br>EN45545-2 R24/R25 (EN ISO 4589-2, EN ISO 5659-2,<br>NF X70-100-1 & 2) Fire & Smoke Certificate   |
| Safety                 | EN 60950-1 (Standard model and 110V model)  |
| Warranty               | 5 years   |

**Software Specification**

|                          |   |
|--------------------------|---|
| Management               | SNMP v1 v2c, v3/ Web/Telnet/CLI   |
| SNMP MIB                 | RFC 1215 Traps MIB,<br>RFC 1213 MIBII<br>RFC 1158 MIBII<br>RFC 1157 SNMP MIB,<br>RFC 1493 Bridge MIB,<br>RFC 1573 IF MIB<br>RFC 2674 VLAN MIB,<br>Partial RFC 1643 EtherLike,<br>Partial RFC 1757 RMON,<br>RFC 2674 Q-Bridge MIB; Bridge MIB,<br>RFC 2790 Host Resource MIB<br>LLDP MIB*<br>RSTP MIB*<br>Private MIB                                  |
| ITU G.8032               | Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (basic mode)<br>Support various ring/chain topologies<br>Includes train dynamic coupling ring & aggregation ring*<br>Enhanced G.8032 ring configuration with ease<br>Co-exist with RSTP on different ports<br>Train mode for auto coupling ring configuration |
| PoE Management           | 1. PoE Detection to check if PD is hang up then restart the PD<br>2. PoE Scheduling to On/OFF PD upon routine time table<br>3. On/ Off, voltage, current, watts, temperature  |
| PTP v2                   | Support hardware-based IEEE1588 PTPv2 in 1µs, End to End (2-step) and Peer to Peer (2-step) modes in Transparent Clock, 2 10/100/1000T and 2 100/1000M Fiber  |
| User friendly UI         | <ul style="list-style-type: none"> <li>■ Auto topology drawing</li> <li>■ Topology demo</li> <li>■ Auto configuration for G.8032(auto mode) for single ring</li> <li>■ Complete CLI for professional setting</li> </ul>   |
| Port Trunk with LACP     | LACP Port Trunk: 8 Trunk groups/Maximum 16 trunk members<br>Aggregation ring for ring redundancy and bandwidth combination*   |
| LLDP                     | Supports LLDP to allow switch to advise its identification and capability on the LAN  |
| CDP                      | Cisco Discovery Protocol for topology mapping   |
| Environmental Monitoring | System status for input voltage, current and ambient temperature to be shown in GUI and sent alerting if any abnormal status  |
| VLAN                     | Port Based VLAN<br>IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.)<br>GVRP** (256 Groups)**, QinQ*  |
| IPv6/4                   | Present   |
| Spanning Tree            | Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree   |
| Quality of Service       | The quality of service determined by port, Tag and IPv4<br>Type of service, IPv4 Differentiated Services Code Points - DSCP   |
| Class of Service         | Support IEEE802.1p class of service, per port provides 8 priority queues  |
| QoS by VLAN              | Tagged QoS by VLAN for all devices in the network   |
| IP Security              | Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.   |
| Login Security           | Supports IEEE802.1X Authentication/RADIUS   |
| Port Mirror              | Support 3 mirroring types: "RX, TX and Both packet"   |
| Network                  | Support 10 IP addresses that have permission to   |

|                   |  |   |
|-------------------|--|---|
| Security          | <ul style="list-style-type: none"> <li>access the switch management and to prevent unauthorized intruder.</li> <li>802.1X access control for port based and MAC based authentication/MAC-Port binding</li> <li>Management access control with priority</li> <li>256 Policy based Access Control List</li> <li>SSL/ SSH for Management</li> <li>HTTPS for secure access to the web interface</li> <li>TACACS+ for Management Authentication*</li> </ul> | <ul style="list-style-type: none"> <li>Repowered auto ring restore</li> <li>Loop protection</li> </ul>  |
| IGMP              | Support IGMP snooping v1,v2,v3; Supports IGMP static route; 256 multicast groups; IGMP router port ; IGMP query; GMRP**  | <b>SNMP Trap</b><br>Up to 10 trap stations; trap types including: <ul style="list-style-type: none"> <li>● Device cold start</li> <li>● Authorization failure</li> <li>● Port link up/link down</li> <li>● DI/DO open/close</li> <li>● Typology change(ITU ring)</li> <li>● PoE ping failure</li> <li>● Power failure</li> <li>● Environmental abnormal</li> </ul>  |
| MVR               | Static multicast forwarding forward reversed IGMP flow (MVR) with multicast packets binding with ports for IP surveillance application   | <b>DHCP</b><br>Provide DHCP Client/ DHCP Server/DHCP Option 82/ DHCP Option 82 server/ Port based&VLAN based DHCP distribution (DHCP relay agent)   |
| Bandwidth Control | Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.                          | <b>Mac based DHCP Server</b><br>Assign IP address by Mac that can include dumb switch in DHCP network<br><br><b>DNS</b><br>Provide DNS client feature and support Primary and Secondary DNS server.<br><br><b>SNTP</b><br>Supports SNTP to synchronize system clock in Internet<br><br><b>Firmware Update</b><br>Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade; Lantech™ InstaConfig** for multiple upgrade<br><br><b>N-Key Configurator**</b><br>RJ45 dongle for firmware upgrade, auto / editable configuration backup/restoration<br><br><b>Configuration upload and download</b><br>Supports text configuration file for system quick installation<br><br><b>IfAlias</b><br>Each port allows an alphabetic string of 128-byte assigned as its own unique name via the SNMP or CLI interface |
| RTC               | Built-in Real Time Clock to keep track of time always  |   |
| Flow Control      | Supports Flow Control for Full-duplex and Back Pressure for Half-duplex  |   |
| System Log        | Supports System log record and remote system log server  |   |
| SMTP/Text SMS     | Supports SMTP Server and 8 e-mail accounts for receiving event alert; can send SMS text alert via mobile   |   |
| Relay Alarm       | Provides one relay output for port breakdown, power fail and alarm.<br><br>Alarm Relay current carry ability: 1A @ DC24V   |   |
| Protection        | <ul style="list-style-type: none"> <li>Miss-wiring avoidance</li> </ul>  |   |

\*Future release  
\*\*Optional

## ORDERING INFOMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model name.

- IPES-5416DFT-8-67-MM.....P/N: 8360-720**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch; dual 48V input; -40°C to 75°C
- IPES-5416DFT-8-67-SM.....P/N: 8360-721**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch; dual 48V input; -40°C to 75°C
- IPES-5416DFT-8-67-MM-BF.....P/N: 8360-722**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch; dual 48V input; -40°C to 75°C; w/ 1 pair fiber bypass protection
- IPES-5416DFT-8-67-SM-BF.....P/N: 8360-723**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch; dual 48V input; -40°C to 75°C; w/ 1 pair fiber bypass protection
- IPES-5416DFT-8-67-MM-BT.....P/N: 8361-722**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch; dual 48V input; -40°C to 75°C; w/ 1 pair GigaT bypass protection
- IPES-5416DFT-8-67-SM-BT.....P/N: 8361-723**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch; dual 48V input; -40°C to 75°C; w/ 1 pair GigaT bypass protection
- IPES-5416DFT-8-67-MM-12V.....P/N: 8360-724**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch; -40°C to 75°C; dual 12V-48V input
- IPES-5416DFT-8-67-SM-12V.....P/N: 8360-725**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch; -40°C to 75°C; dual 12V-48V input

- **IPES-5416DFT-8-67-MM-12V-BF.....P/N: 8360-728**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 75°C; dual 12V-48V input; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-67-SM-12V-BF.....P/N: 8360-729**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 75°C; dual 12V-48V input; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-67-MM-12V-BT.....P/N: 8361-728**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 75°C; dual 12V-48V input; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-67-SM-12V-BT.....P/N: 8361-729**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 75°C; dual 12V-48V input; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-67-MM-72V.....P/N: 8360-732**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 7°C; dual 72V input
- **IPES-5416DFT-8-67-SM-72V.....P/N: 8360-733**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 60°C; dual 72V input
- **IPES-5416DFT-8-67-MM-72V-BF.....P/N: 8360-734**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 60°C; dual 72V input; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-67-SM-72V-BF.....P/N: 8360-735**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 60°C; dual 72V input; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-67-MM-72V-BT.....P/N: 8361-734**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 60°C; dual 72V input; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-67-SM-72V-BT.....P/N: 8361-735**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 60°C; dual 72V input; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-67-MM-110V.....P/N: 8360-749**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 75°C; dual 72V input
- **IPES-5416DFT-8-67-SM-110V.....P/N: 8360-750**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP67 Switch;  
 -40°C to 75°C; dual 110V input
- **IPES-5416DFT-8-43-MM.....P/N: 8360-7201**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 dual 48V input; -40°C to 75°C
- **IPES-5416DFT-8-43-SM.....P/N: 8360-7211**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 dual 48V input; -40°C to 75°C
- **IPES-5416DFT-8-43-MM-BF.....P/N: 8360-7221**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 dual 48V input; -40°C to 75°C; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-43-SM-BF.....P/N: 8360-7231**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 dual 48V input; -40°C to 75°C; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-43-MM-BT.....P/N: 8361-7221**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 dual 48V input; -40°C to 75°C; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-43-SM-BT.....P/N: 8361-7231**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 dual 48V input; -40°C to 75°C; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-43-MM-12V.....P/N: 8360-7241**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 -40°C to 75°C; dual 12V-48V input
- **IPES-5416DFT-8-43-SM-12V.....P/N: 8360-7251**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 -40°C to 75°C; dual 12V-48V input
- **IPES-5416DFT-8-43-MM-12V-BF.....P/N: 8360-7281**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 -40°C to 75°C; dual 12V-48V input; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-43-SM-12V-BF.....P/N: 8360-7291**  
 16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;  
 -40°C to 75°C; dual 12V-48V input; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-43-MM-12V-BT.....P/N: 8361-7281**  
 16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2<sup>+</sup> 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch;

- 40°C to 75°C; dual 12V-48V input; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-43-SM-12V-BT.....P/N: 8361-7291**  
16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch; -40°C to 75°C; dual 12V-48V input; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-43-MM-72V.....P/N: 8360-7321**  
16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch; -40°C to 60°C; dual 72V input
- **IPES-5416DFT-8-43-SM-72V.....P/N: 8360-7331**  
16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch; -40°C to 60°C; dual 72V input
- **IPES-5416DFT-8-43-MM-72V-BF.....P/N: 8360-7341**  
16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch; -40°C to 60°C; dual 72V input; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-43-SM-72V-BF.....P/N: 8360-7351**  
16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch; -40°C to 60°C; dual 72V input; w/ 1 pair fiber bypass protection
- **IPES-5416DFT-8-43-MM-72V-BT.....P/N: 8361-7341**  
16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch; -40°C to 60°C; dual 72V input; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-43-SM-72V-BT.....P/N: 8361-7351**  
16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch; -40°C to 60°C; dual 72V input; w/ 1 pair GigaT bypass protection
- **IPES-5416DFT-8-43-MM-110V.....P/N: 8360-7491**  
16 10/100TX + 2 1000T + 2 100M 2KM / Giga SX 0.5KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch; -40°C to 75°C; dual 110V input
- **IPES-5416DFT-8-43-SM-110V.....P/N: 8360-7501**  
16 10/100TX + 2 1000T + 2 100M 10KM / Giga LX 10KM PTP L2+ 8 PoE at/af up to 30W Managed Industrial M12 IP43 Switch; -40°C to 75°C; dual 110V input
- **N-key Configurator.....P/N: 8850-100**  
RJ45 connector dongle for firmware upgrade, auto/editable configuration backup and restoration; -20°C to 60°

## OPTIONAL ACCESSORIES

### M12/M23 Connector & Cable

- **ECONM23-5P(F)70CM CABLE**      M23 power cable 90 degree angle, 70cm, 5 pin
- **ECAB124030MJS**                      4 Pin M12 RJ45 Male 3 Meters; STP Cable

**Lantech Communications Global Inc.**

www.lantechcom.tw  
info@lantechcom.tw

© 2013 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
Lantech may make changes to specification and product descriptions at anytime, without notice.