

IPES-3424DSFP-2P

24 10/100TX PoE + 4 DualSpeed SFP Industrial L2+ Switch w/ enhanced G.8032 Ring

- High-density 10/100TX L2+ managed PoE at/af switch
- Enhanced G.8032 ring protection < 20ms with easy configuration; Dynamic coupling ring; Aggregation ring*
- Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82 for Port&VLAN based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH/SSL, TACAS+*, HTTPS, ACL, IPv6, SMS
- Support relay contact DIDO & Environmental Monitoring for real time voltage, current, total PoE load and case ambient temperature
- Miss-wiring avoidance & Repowered auto ring restore
- User friendly UI, including auto topology drawing and DDM threshold monitoring with dB values***, Complete CLI supported
- USB slot for edited restoration and auto backup



OVERVIEW

Lantech IPES-3424DSFP-2P is a high performance L2 + PoE managed industrial switch which provides L2 wire speed and advanced security function for network aggregation and backbone deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms including dynamic coupling ring, enhanced mode for easy configuration and aggregation ring*, comprehensive QoS, QoS by VLAN, advanced security including ACL L2/L3, SSH/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port, QinQ* (double tag VLAN) which are important features required in train and large network. It also supports Cisco Discovery Protocol (CDP) and LLDP for Ciscoswitches to detect the switch info and show on L2 map topology.

Compliant with IEEE802.3at/af standard, the Lantech IPES-3424DSFP-2P is able to feed each PoE port up to 30Watts@54VDC providing the connected PD devices at Gigabit speed. It also supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD is still alive then sending power; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Per port PoE status explicit voltage, current, watt and poe temperature information.

Lantech IPES-3424DSFP-2P features enhanced G.8032 ring which can be self-healed in less than 20ms for ring/chain topologies which covers dynamic coupling ring & aggregation ring* protection. The innovative auto-Ring configurator (auto mode) can calculate owner and neighbor in one step. The enhanced mode and dynamic coupling ring configuration have

never been easier. It supports MSTP that allows RSTP over Vlan for redundant links. The ITU G.8032 Ring and RSTP can be co-existed in the same switch with different ports for the most flexible protection.

The IPES-3424DSFP-2P also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IPES-3424DSFP-2P is able to alert with the LED indicator and send out an email, traps or a SMS text. Repowered auto ring restore function (node failure protection) ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed when power back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

DHCP option 82 and relay agent function (port&vlan based DHCP distribution) can offer the same IP address on port base or vlan base where there is need to replace the new device connecting to Lantech switches to avoid any network disruption. The built-in DHCP Option 82 server offers the convenience of police setting on the switch. Mac based DHCP server function assigns an IP address according to its MAC address to include dumb switches in DHCP network.

The user friendly UI, innovative auto topology drawing and topology demo makes IPES-3424DSFP-2P much easier to get

hands-on. The IPES-3424DSFP-2P supports DMI interface that can correspond with DDM SFPs (Digital diagnostic monitor) to display the five parameters in Lantech's UI, including optical output power, input power, temperature, laser bias current and transceiver supply voltage***. The TX power/RX power raw data is automatically converted to dB values for installer, making it easier to calculate the fiber distance. The complete CLI support allows professional setting.

The exclusive environmental monitoring function provides real-time status for input voltage, current and case ambient temperature where can set SMS text, email or trap alert when abnormal.

Lantech IPES-3424DSFP-2P configuration can be exported and editable which makes the mass deployment easier. Also, it designs with a factory reset button where user can reset all settings to factory default. The built-in watch dog design can reboot switch automatically when CPU is found dead. The USB slot allows user to backup/ restore configuration.

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance

the bandwidth management in a network.

The IPES-3424DSFP-2P DDO function can support additional open/close physical contact for designate applications besides Port / Power events, for example, DDO function can trigger alarm if the switch was moved or stolen. In case of events, the IPES-3424DSFP-2P will immediately send an email, SMS text to pre-defined addresses as well as SNMP Traps out. It provides 2DI and 2DO while disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors into the auto alarm system and transfer the alarm information to IP network with email, text and SNMP.

Lantech IPES-3424DSFP-2P supports PoE power inputs from DC45~56V with dual system power. It features high reliability and robustness withstanding extensive EMI/RFI phenomenon, lighting surge, inductive load switching, high ESD, high fault current environment usually found in Substation, Steel automation, Mining and Process control etc. Supporting the latest IEEE (Efficient Energy Ethernet) standard, IPES-3424DSFP-2P can run under widely operational temperature (-40°C~75°C) in the harsh environment.

FEATURES & BENEFITS

■ System Interface/Performance

- 24x10/100TX PoE at/af+ 4 100M/1000M SFP L2+
- 16K MAC Address Table
- Dual Power Supply Design for DC(9.5V~60VDC), AC(85V~265VAC) or 100V~370VDC
- PoE power input with budget up to 720W
- -40to 75C operation temperature(-E model)

■ User friendly UI, Auto topology drawing, topology demo, Complete CLI for professional setting

■ IP v6/v4 supported

■ Enhanced G.8032 Ring protection in 20ms < 256 switches

- Support various ring/chain topologies, including dynamic coupling ring& aggregation ring*
- Enhanced G.8032 ring configuration with ease
- Auto ring configuration(auto mode) for single ring
- Co-exist with RSTP on different ports

■ Aggregation ring for ring redundancy and bandwidth combination*

■ DDM to support SFP diagnostic function***

- Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance

■ 256 groups MSTP over VLAN

■ VLAN

- 4K 802.1Q Vlan, Port Based VLAN,GVRP**, QinQ*

■ Port Trunk with LACP 14 trunks with automatic link failover

■ LACP link aggregation to add bandwidth

■ QoS (Quality of Service)

- Supports IEEE 802.1p CoS
- Per port provides 8 priority queues

- Port-base, Tag-base and TOS Priority

- Strict priority and WRR

■ Security

- SSL/SSH/ACL L2&L3
- Port Security: MAC address entries/Filter/MAC-Port binding
- IP Security: IP address security management to prevent unauthorized intruder.
- Management access control with priority
- Login Security: IEEE802.1X/RADIUS
- HTTPS for secure access to the web interface

■ Miss-wiring avoidance

- LED indicator
- Email, traps, or SMS notification

■ Repowered auto ring restore(node failure protection)

- Ensure the switches in a ring to survive after power breakout is back
- The status can be shown in NMS when each switch is back

■ IGMP v1,v2,v3 and Proxy** for Multimedia Application; GMRP**

■ IGMP router to select another Query mode and support IGMP static routing for reversed IGMP flow (MVR) to bind with port for IP surveillance application

■ Supports IEEE802.1ab LLDP, Cisco CDP

■ DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server for Port&Vlan based DHCP distribution


■ Mac based DHCP server to assign IP address that includes dumb switches in DHCP network

■ Bandwidth Control

- Ingress Packet Filter and Egress Rate Limit
- Broadcast/Multicast Packet Filter Control

- System Event Log, Email alert, SMS(mobile text) and SNMP Trap for alarm support
- Environmental sensor built-in to detect temperature, voltage, current and total PoE load and send out SNMP traps , SMS and emails if there is abnormal events
- TFTP/HTTP firmware upgrade; Lantech™ InstaConfig** for multiple upgrade; USB for edited restoration and auto backup
- Reset / Factory default button to restore factory setting
- Watch dog design to reboot switch if CPU is found dead
- Provides EFT protection $\pm 4K$ VDC for power line
- Supports $\pm 8KV$ contact & $\pm 15KV$ air Ethernet ESD protection
- 2 DI/DO and 1 relay contact alarm

DIMENSIONS (unit=mm)

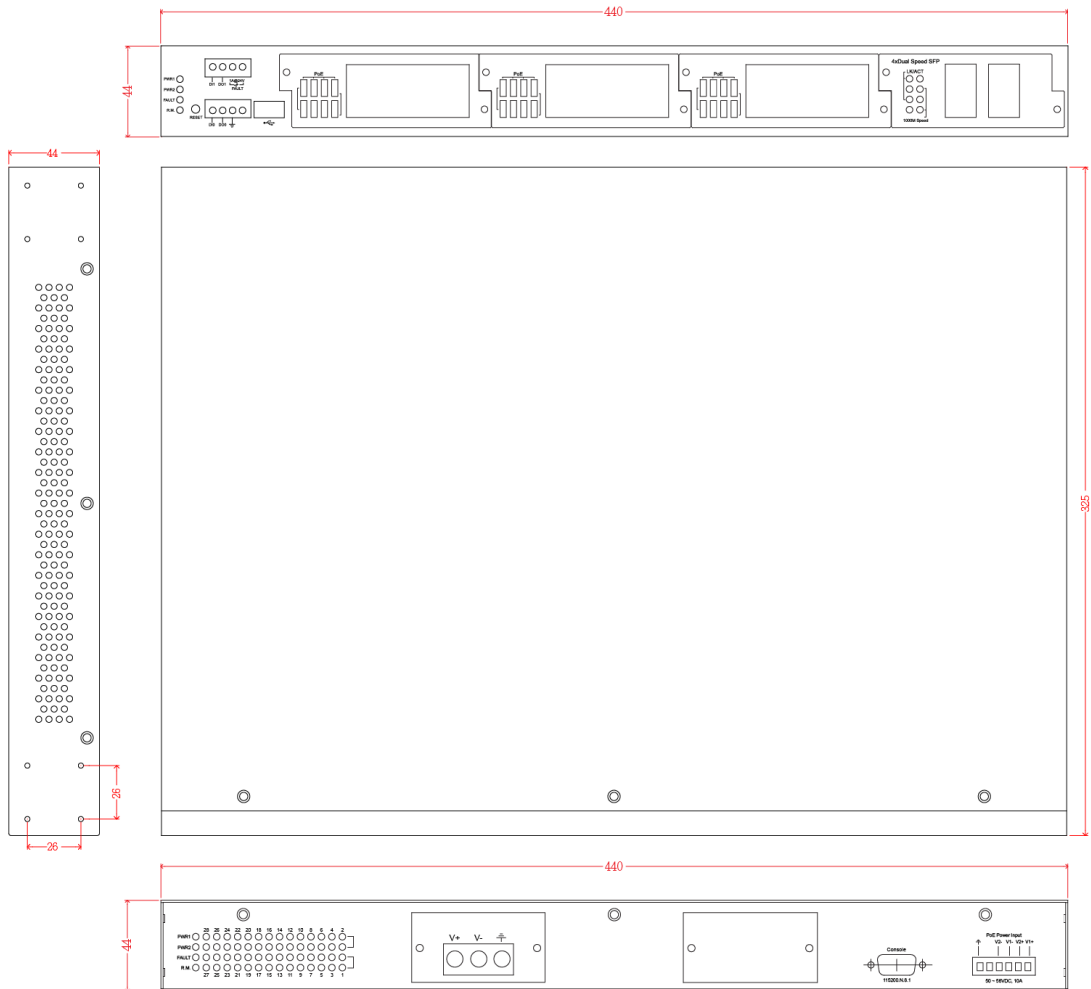

SPECIFICATION

Hardware Specification	
IEEE Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3z 1000Base-X Ethernet IEEE 802.3x Flow Control Capability ANS/IEEE 802.3 Auto-negotiation IEEE 802.1Q VLAN IEEE 802.1p Class of Service IEEE 802.1X Access Control
	IEEE 802.1D Spanning Tree IEEE 802.1w Rapid Spanning Tree IEEE 802.1s Multiple Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.1AB Link Layer Discovery Protocol (LLDP) IEEE 802.1x User Authentication (Radius) IEEE 802.3t/af Power Over Ethernet
Switch	Back-plane (Switching Fabric): 10.4Gbps

Architecture									
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port								
CPU	Marvell 800Mhz								
RAM	256M Byte								
Flash	128M Byte								
MAC Address	16K MAC address table								
Jumbo frame	9KB on all ports								
PoE pin assignment	RJ-45 port # 1~# 24 support PoE at/af End-point, Alternative A mode. Per port provides up to 30W @54V capability. Positive (VCC+): RJ-45 pin 1,2. Negative (VCC-): RJ-45 pin 3,6.								
PoE input voltage & Power feed voltage	<table border="1"> <tr> <td>Input V</td> <td>Active Mode A /Output V</td> </tr> <tr> <td>45~56V(af)</td> <td>48V@15W</td> </tr> <tr> <td>54~56V(at)</td> <td>54V@30W</td> </tr> </table>	Input V	Active Mode A /Output V	45~56V(af)	48V@15W	54~56V(at)	54V@30W		
Input V	Active Mode A /Output V								
45~56V(af)	48V@15W								
54~56V(at)	54V@30W								
Connectors	24 10/100TX RJ-45 with auto MDI/MDI-X function 4 100M / 1000M Mini-GBIC : SFP sockets RS-232 console: Female DB-9 USB for automatic backup and restore								
DDM	Conform to SFF-8472 to show diagnostic SFP with temperature, current, voltage, input and output power								
Protocol	CSMA/CD								
LED	Per unit: Power 1 (Green), Power 2 (Green), Alarm (Red) ,R.M (Green) Link/Activity (Green), Full duplex/collision(Yellow)), MINI GBIC (Link/Activity)(Green)								
Power Supply	Two power sockets for switch system, 9.5~60VDC input IEC320 85~265VAC input (-AC model) AC/DC 85~265VAC/100V~370VDC input (-HV model) 48VDC for PoE								
Power Consumption	Full load: 30W/ Unload: 13W								
PoE Power Budget	720W								
Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V								
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA								
RTC	RTC(Real Time Clock) to keep track of time always								
Factory reset button & watch dog design	Factory reset button to restore back to factory default settings. Watch dog design can reboot switch automatically when CPU is found dead								
Case Dimension	19" Metal case,IP-30; 440mm(W)x325mm(D)x44mm(H)								
Operating Humidity	5%~95% (Non-condensing)								
Operating Temperature	Standard: -20°C ~60°C Extended temperature : -40°C ~75°C								
Storage Temperature	-40°C ~85°C								
EMI	FCC Class A, CE EN61000-4-2 (ESD),								
			CE EN61000-4-3 (RS), CE EN61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8, CE EN61000-4-11, CE EN61000-4-12, CE EN61000-6-2, CE EN61000-6-4						
Stability Testing			IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration), IEC60870-2-2, IEC60068-2-30						
Warranty			5 years						
Software Specification									
Management			SNMP v1 v2c, v3/ Web/Telnet/CLI Management						
SNMP MIB			RFC 1215 Traps MIB, RFC 1213 MIBII RFC 1158 MIBII RFC 1157 SNMP MIB, RFC 1493 Bridge MIB, RFC 1573 IF MIB RFC 2674 VLAN MIB, Partial RFC 1643 EtherLike, Partial RFC 1757 RMON, RFC 2674 Q-Bridge MIB; Bridge MIB, RFC 2790 Host Resource MIB LLDP MIB* RSTP MIB* Private MIB						
VLAN			Port based VLAN, up to 28 groups IEEE802.1Q Tag VLAN Static VLAN groups up to 256, Dynamic VLAN group up to 2048, VLAN ID from 1 to 4096 GVRP up to 256 groups** Multicast VLAN registration*, QinQ*						
Port Trunk with LACP			LACP Port Trunk: 8 Trunk groups/Maximum 24 trunk members Aggregation ring for ring redundancy and bandwidth combination*						
LLDP			Support LLDP to allow switch to advise its identification and capability on the LAN						
CDP			Cisco Discovery protocol for topology mapping						
ITU G.8032			Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (basic mode) Support various ring/chain topologies Includes dynamic coupling ring & aggregation ring* Enhanced G.8032 ring configuration with ease Co-exist with RSTP on different ports						
PTP v2			Support hardware-based IEEE1588 PTPv2 in 1µs, End to End (2-step) and Peer to Peer (2-step) modes in Transparent Clock, with 4 Dual Speed SFP						
User friendly UI			<ul style="list-style-type: none"> ■ Auto topology drawing with detail node info ■ DDM threshold monitoring with dB values*** ■ Complete CLI for professional setting 						
Spanning Tree			Support IEEE802.1d Spanning Tree,IEEE802.1w Rapid Spanning Tree, IEEE 802.1s MSTP						
Quality of Service			The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP						
Class of Service			Support IEEE802.1p class of service, per port provides 8 priority queues						
QoS by VLAN			Tagged QoS by VLAN for all devices in the network						
Port Security			Support 50 entries of MAC address for static MAC and another 50 for MAC filter						
Port Mirror			Support 3 mirroring types: "RX, TX and Both packet"						
Environmental Monitoring			Internal sensor to monitor temperature, voltage and current and send SMS text, SNMP traps and emails if						

	any abnormal events		■ Per port PoE status including voltage, current, watt and PoE temperature
Multicast Filtering & IGMP	Support IGMP snooping v1,v2,v3; Supports IGMP static route IGMP query and router port 256 multicast groups and IGMP query GMRP**	Flow Control	Support Flow Control for Full-duplex and Back Pressure for Half-duplex
MVR	Static multicast forwarding forward reversed IGMP flow (MVR) with multicast packets binding with ports for IP surveillance application	System Log	Support System log record and remote system log server
Bandwidth Control	Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type, the limit rates are 0~100Mbps. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set from 0 to 100Mbps The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.	SMTP/Text SMS	Supports SMTP Server and 8 e-mail accounts for receiving event alert; can send SMS text alert via mobile
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/MAC-Port binding Management access control with priority 256 Policy based Access Control List SSL/ SSH for Management HTTPS for secure access to the web interface TACACS+ for Management Authentication*	SNMP Trap	Up to 10 trap stations; trap types including: <ul style="list-style-type: none"> ● Device cold start ● Authorization failure ● Port link up/link down ● DI/DO open/close ● Typology change(ITU ring) ● PoE ping failure ● Power failure ● Environmental abnormal
Protection	<ul style="list-style-type: none"> ■ Miss-wiring avoidance ■ Repowered auto ring restore (node failure protection) ■ Loop protection 	DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based&VLAN based DHCP distribution (DHCP relay agent)
PoE Management	<ul style="list-style-type: none"> ■ PoE Detection to check if PD is hang up then restart the PD ■ PoE Scheduling to On/OFF PD upon routine time table 	Mac based DHCP Server	Assign IP address by Mac that can include dumb switch in DHCP network
		DNS	Provide DNS client feature and support Primary and Secondary DNS server.
		SNTP	Support SNTP to synchronize system clock in Internet
		Firmware Update	Support TFTP /HTTP firmware update ; InstaConfig mass firmware upgrade**
		Configuration backup and restore	Support text backup and restore; USB for edited restoration and auto backup

*Future Release

**Optional

***Optional DDM SFP required

ORDERING INFORMATION

- **IPES-3424DSFP-2P.....P/N: 8380-602**
24 10/100TX POE at/af + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated DC 12~56VDC power supply + 1x additional power socket + 1x 48VDC PoE power input; -20°C to 60°C
- **IPES-3424DSFP-2P-E.....P/N: 8380-603**
24 10/100TX POE at/af + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated DC 12~56VDC power supply + 1x additional power socket + 1x 48VDC PoE power input; -40°C to 75°C
- **IPES-3424DSFP-2P-AC.....P/N: 8380-604**
24 10/100TX POE at/af + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated AC85~265VAC IEC320 power supply + 1x additional power socket + 1x 48VDC PoE power input; -20°C to 60°C
- **IPES-3424DSFP-2P-AC-E.....P/N: 8380-605**
24 10/100TX POE at/af + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated AC85~265VAC IEC320 power supply + 1x additional power socket + 1x 48VDC PoE power input; -40°C to 75°C
- **IPES-3424DSFP-2P-HV.....P/N: 8380-606**
24 10/100TX POE at/af + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated AC/DC 85~265VAC/100V~370VDC power supply + 1x additional power socket + 1x 48VDC PoE power input; -20°C to 60°C
- **IPES-3424DSFP-2P-HV-E.....P/N: 8380-607**
24 10/100TX POE at/af + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated AC/DC 85~265VAC/100V~370VDC power supply + 1x additional power socket + 1x 48VDC PoE power

input; -40°C to 75°C

OPTIONAL ACCESSORIES

55VDC DIN Rail Power for 802.3at Applications

- **AD1240-48S-5** 48-56VDC, 4.3A, Wide AC Input, Build-in fan Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **AD1360-48S-5** 48-56VDC, 6.5A, Wide AC Input, Build-in fan Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **AD1500-48S-5** 48-56VDC, 9A, Wide AC Input, Build-in fan Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

Mini GBIC (SFP)

- | | |
|--|--|
| ■ 8330-162 MINI GBIC 1000SX (LC/0.5km) Transceiver | ■ 8330-061 100Base LX 30KM, Single-mode, LC Transceiver |
| ■ 8330-163 MINI GBIC 1000SX2 (LC/2km) Transceiver | ■ 8330-188 LTSFP-1000BX-10KM Transceiver (WDM 1310) |
| ■ 8330-165 MINI GBIC 1000LX (LC/10km) Transceiver | ■ 8330-189 LTSFP-1000BX-10KM Transceiver (WDM 1550) |
| ■ 8340-0591 MINI GBIC 1000LHX (LC/40km) Transceiver | ■ 8330-186 LTSFP-1000BX-20KM Transceiver (WDM 1310) |
| ■ 8330-166 MINI GBIC 1000XD (LC/50km) Transceiver | ■ 8330-187 LTSFP-1000BX-20KM Transceiver (WDM 1550) |
| ■ 8330-169 MINI GBIC 1000XD (LC/60km) Transceiver | ■ 8330-180 LTSFP-1000BX-40KM Transceiver (WDM 1310) |
| ■ 8330-167 MINI GBIC 1000ZX (LC/80km) Transceiver | ■ 8330-182 LTSFP-1000BX-40KM Transceiver (WDM 1550) |
| ■ 8330-170 MINI GBIC 1000EZ (120km) Transceiver | ■ 8330-181 LTSFP-1000BX-60KM Transceiver (WDM 1310) |
| ■ 8330-168 MINI GBIC 10/100/1000T (100m) Transceiver | ■ 8330-183 LTSFP-1000BX-60KM Transceiver (WDM 1550) |
| ■ 8330-060 100Base FX 2KM, Multi-mode, LC Transceiver | ■ 8330-184 LTSFP-1000BX-80KM Transceiver (WDM 1490) |
| ■ 8330-065 100Base FX 5KM, Multi-mode, LC Transceiver | ■ 8330-185 LTSFP-1000BX-80KM Transceiver (WDM 1550) |

All SFP with -D are with DDM function

Lantech Communications Global Inc.

www.lantechcom.tw
 info@lantechcom.tw

© 2014 Copyright Lantech Communications Global Inc. all rights reserved.
 The revise authority rights of product specifications belong to Lantech Communications Global Inc.
 Lantech may make changes to specification and product descriptions at anytime, without notice.

Datasheet Version 1.1

www.lantechcom.tw | info@lantechcom.tw